

Kailux


Last Update : 2020 . 08

Code  
E0125

Technical data

LED Source	SMD
Luminous Flux (lm)	7946(5700K)
Power (W)	70
Luminous efficiency (lm/W)	116
Beam angle (°)	Symmetry
Color Temperature (K)	3000~6000
CRI	≥80
Installation	-
Dimension (mm)	Ø500 x 1035 x 4000
Housing	Cast aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Opal polycarbonate
Reflector	-
Optic	-
IP rating	65
Finish Color	Dark gray or Silver powdercoat finish
Electrical Data	AC 220~240V, 50~60 Hz
Control	-
Certification	KS, 고효율

Drawing

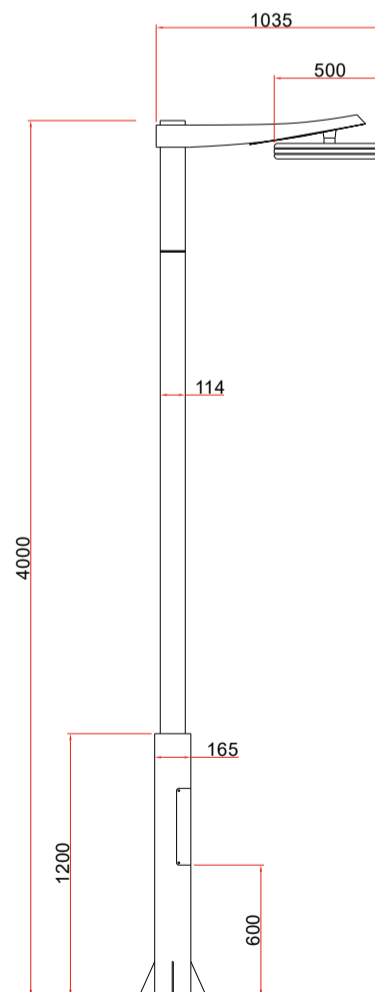

Photometric Data

