

Kailux

Last Update : 2022 . 11


Code

I0305-10S57Z000

Technical data

LED Source	SMD
Luminous Flux (lm)	1050
Power (W)	10
Luminous efficiency (lm/W)	105
Beam angle (°)	-
Color Temperature (K)	5700
CRI	≥80
Installation	Ceiling
Dimension (mm)	Ø180 * 145 * 2EA
Housing	Aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Acrylic
Reflector	-
Socket	-
IP rating	-
Finish Color	White or Silver powdercoat finish
Electrical Data	AC 220~240V, 50~60 Hz (SMPS 일체형)
Control	-
Certification	KS

Drawing

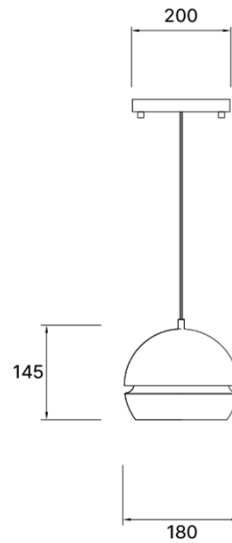

Kailux

Last Update : 2022 . 11

Code

I0305-20S57Z000

Technical data

LED Source	SMD
Luminous Flux (lm)	2100
Power (W)	20 (10 + 10)
Luminous efficiency (lm/W)	105
Beam angle (°)	-
Color Temperature (K)	5700
CRI	≥80
Installation	Ceiling
Dimension (mm)	Ø180 * 145 * 2EA
Housing	Aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Acrylic
Reflector	-
Socket	-
IP rating	-
Finish Color	White or Silver powdercoat finish
Electrical Data	AC 220~240V, 50~60 Hz (SMPS 일체형)
Control	-
Certification	KS

Drawing

