

**Kailux**

Last Update : 2023 . 08


**Code**  
E0601-15L30L000

**Technical data**



LED Source	BULB
Luminous Flux (lm)	-
Power (W)	-
Luminous efficiency (lm/W)	-
Beam angle (°)	-
Color Temperature (K)	-
CRI	≥80
Installation	Floor
Dimension (mm)	135 x 232 x 261
Housing	Diecast aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Clear tempered glass
Reflector	-
Socket	E26
IP rating	65
Finish Color	Dark gray powdercoat finish
Electrical Data	AC 220~240V, 50~60 Hz
Control	-
Certification	-

**Drawing**



**Photometric Data**

Condition	-
-----------	---

Kailux

Last Update : 2020 . 08


**Code**  
E0601-15L30L000-S

**Technical data**



LED Source`	BULB
Luminous Flux (lm)	-
Power (W)	-
Luminous efficiency (lm/W)	-
Beam angle (°)	-
Color Temperature (K)	-
CRI	≥80
Installation	Floor
Dimension (mm)	135 x 232 x 436
Housing	Diecast aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Clear tempered glass
Reflector	-
Socket	E26
IP rating	65
Finish Color	Dark gray powdercoat finish
Electrical Data	AC 220~240V, 50~60 Hz
Control	-
Certification	-

**Drawing**

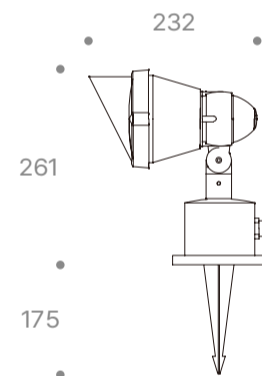

**Photometric Data**

Condition	-
-----------	---