


Code

E0908-13S30A100-OP / E0908-13S30B100-OP / E0908-13S30D100-OP

Technical data

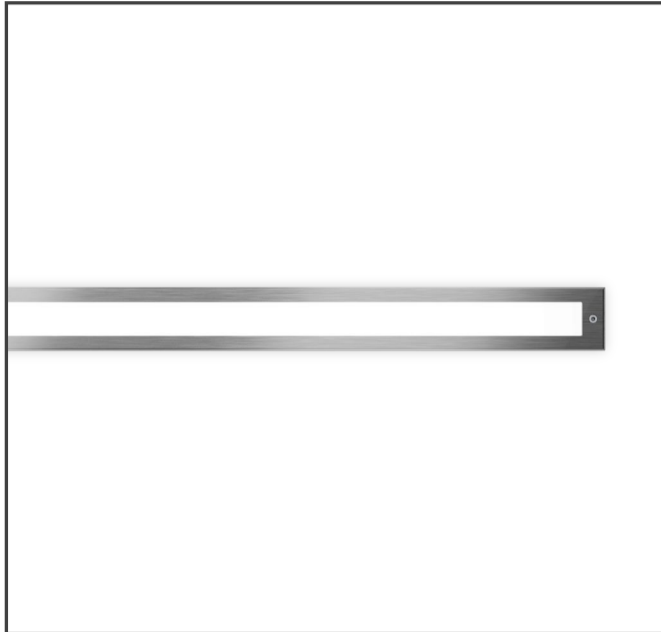


LED Source	SMD
Luminous Flux (lm)	650(3000K)
Power (W)	13
Luminous efficiency (lm/W)	50
Beam angle (°)	15, 30, 60
Color Temperature (K)	3000
CRI	≥80
Installation	Inground
Dimension (mm)	80 x 1250 x 84
Housing	Diecast aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Opal glass
Reflector	-
Optic	-
IP rating	67
Finish Color	-
Electrical Data	DC 24V
Control	-
Certification	-

Drawing



Photometric Data

Condition 27W . 3000K . 2580lm




E0908 Series

— C0C180

Code

E0908-06S30A060-OP / E0908-06S30B60-OP / E0908-06S30D060-OP

Technical data

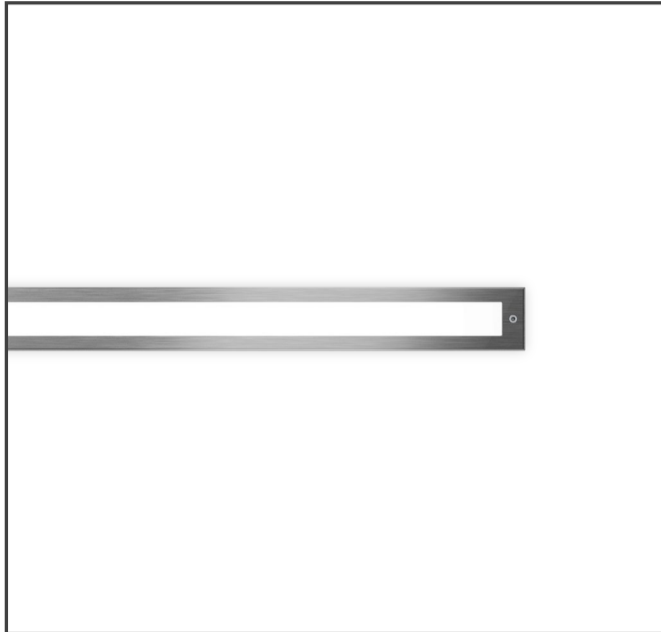

LED Source	SMD
Luminous Flux (lm)	300(3000K)
Power (W)	6
Luminous efficiency (lm/W)	50
Beam angle (°)	15, 30, 60
Color Temperature (K)	3000
CRI	≥80
Installation	Inground
Dimension (mm)	80 x 650 x 84
Housing	Diecast aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Opal glass
Reflector	-
Optic	-
IP rating	67
Finish Color	-
Electrical Data	DC 24V
Control	-
Certification	-

Drawing



Photometric Data

Condition	-
-----------	---