



Code
E0909-29S30Z090

Technical data

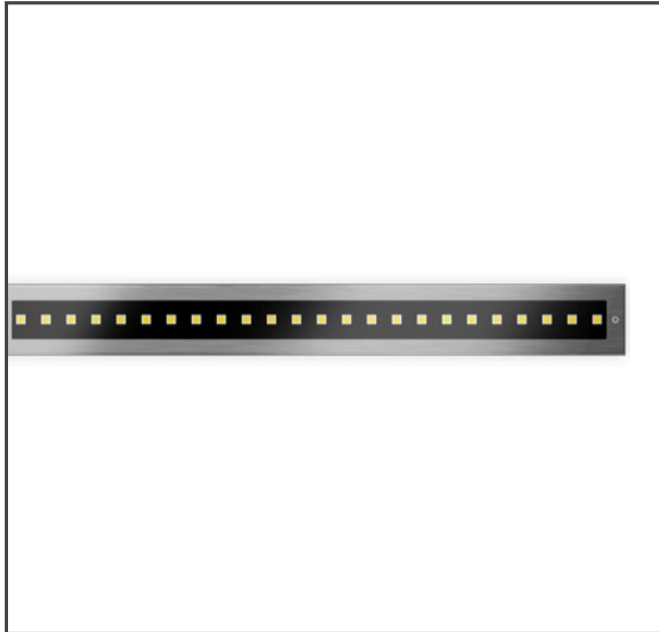

LED Source	SMD
Luminous Flux (lm)	2320(3000K)
Power (W)	29
Luminous efficiency (lm/W)	80
Beam angle (°)	Asymmetry
Color Temperature (K)	3000
CRI	≥80
Installation	Inground
Dimension (mm)	108 x 950 x 102
Housing	Diecast aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Clear tempered glass
Reflector	-
Optic	PMMA
IP rating	67
Finish Color	-
Electrical Data	DC 24V
Control	-
Certification	-

Drawing

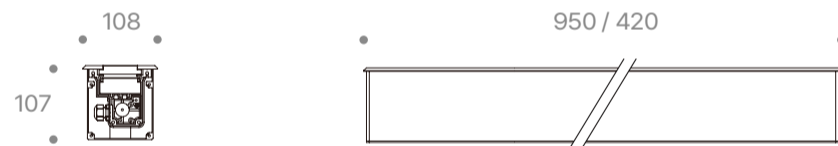


Photometric Data

Condition	-
-----------	---


Code
E0909-11S30Z040

Technical data

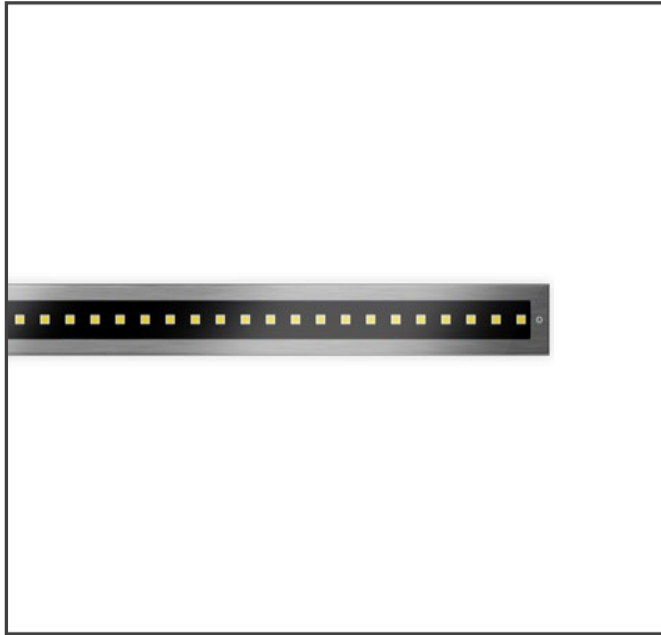

LED Source	SMD
Luminous Flux (lm)	880(3000K)
Power (W)	11
Luminous efficiency (lm/W)	80
Beam angle (°)	Asymmetry
Color Temperature (K)	3000
CRI	≥80
Installation	Inground
Dimension (mm)	108 x 420 x 102
Housing	Diecast aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Clear tempered glass
Reflector	-
Optic	PMMA
IP rating	67
Finish Color	-
Electrical Data	DC 24V
Control	-
Certification	-

Drawing

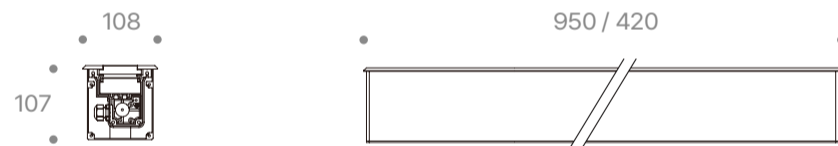

Photometric Data

Condition	-
-----------	---