

Kailux

Last Update : 2023 . 08


Code
E0630-20C30A000

Technical data



LED Source	COB
Luminous Flux (lm)	1776
Power (W)	20
Luminous efficiency (lm/W)	89
Beam angle (°)	15
Color Temperature (K)	3000
CRI	≥80
Installation	Floor
Dimension (mm)	Ø140 x 152 x 217
Housing	Diecast aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Clear tempered glass
Reflector	-
Socket	-
IP rating	65
Finish Color	Dark gray powdercoat finish
Electrical Data	AC 220~240V, 50~60 Hz
Control	-
Certification	-

Drawing

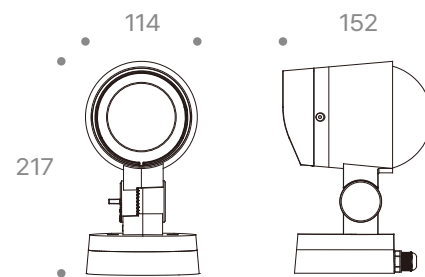

Photometric Data

Condition	-
-----------	---