

**Kailux**

Last Update : 2023 . 08


**Code**  
E0411-20C30Z000

**Technical data**




LED Source	COB
Luminous Flux (lm)	715 x 2(3000K)
Power (W)	7.5 x 2
Luminous efficiency (lm/W)	83
Beam angle (°)	12, 24, 36
Color Temperature (K)	3000
CRI	≥80
Installation	Wall
Dimension (mm)	165 x 107 x 85
Housing	Diecast aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Clear tempered glass
Reflector	Aluminium
Optic	-
IP rating	65
Finish Color	Dark gray powdercoat finish
Electrical Data	AC 220~240V, 50~60 Hz
Control	-
Certification	-

**Drawing**

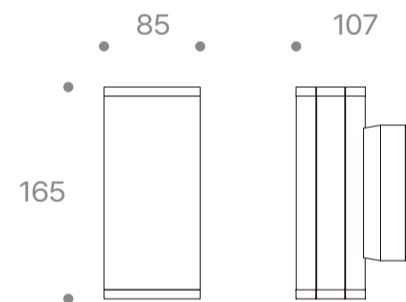

**Photometric Data**

Condition	7.5W x 2 . 3000K . 715lm x 2
-----------	------------------------------

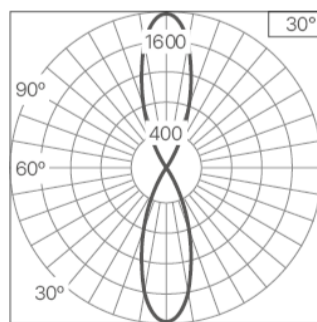

**Kailux**

Last Update : 2023 . 08


**Code**  
E0411-20C30Z000-H

**Technical data**



LED Source	COB
Luminous Flux (lm)	747 x 2(3000K)
Power (W)	7.5 x 2
Luminous efficiency (lm/W)	83
Beam angle (°)	12, 24, 36
Color Temperature (K)	3000
CRI	≥80
Installation	Wall
Dimension (mm)	225 x 107 x 85
Housing	Diecast aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Clear tempered glass
Reflector	Aluminium
Optic	-
IP rating	65
Finish Color	Dark gray powdercoat finish
Electrical Data	AC 220~240V, 50~60 Hz
Control	-
Certification	KS

**Drawing**

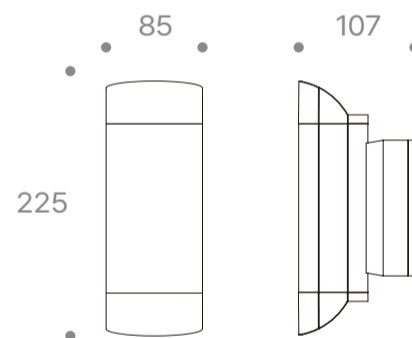

**Photometric Data**

Condition	7.5W x 2 . 3000K . 747lm x 2
-----------	------------------------------

