


Kailux

Last Update : 2022 . 11

Code
E0430-36S30Z000

Technical data

LED Source	SMD
Luminous Flux (lm)	-
Power (W)	36 (18 + 18)
Luminous efficiency (lm/W)	-
Beam angle (°)	-
Color Temperature (K)	3000
CRI	≥80
Installation	Wall
Dimension (mm)	200 x 150 x 2006
Housing	Aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Opal polycarbonate
Reflector	-
Socket	-
IP rating	54
Finish Color	Dark gray powdercoat finish
Electrical Data	AC 220~240V, 50~60 Hz
Control	-
Certification	-

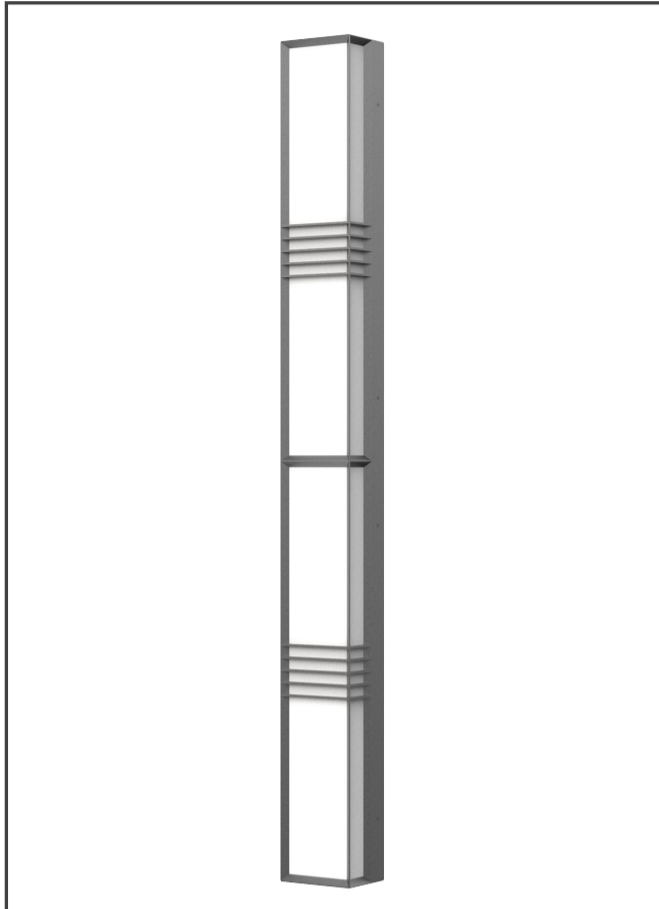

Drawing

