

Code


E0902-03C30A000-T / E0902-03C30B000-T / E0902-03C30D000-T

Technical data



LED Source	COB
Luminous Flux (lm)	145(3000K)
Power (W)	3
Luminous efficiency (lm/W)	48
Beam angle (°)	-
Color Temperature (K)	3000
CRI	≥80
Installation	Inground
Dimension (mm)	115 x 140
Housing	Diecast aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Clear tempered glass
Reflector	Aluminium
Optic	-
IP rating	67
Finish Color	-
Electrical Data	DC 24V
Control	-
Certification	-

Drawing

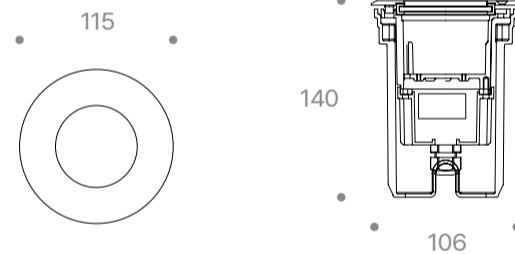


Accessory



Photometric Data

Condition	3W . 3000K . 145lm
-----------	--------------------



Code


E0902-07C30A000 / E0902-07C30B000 / E0902-07C30D000

Technical data


LED Source	COB
Luminous Flux (lm)	610(3000K)
Power (W)	7.5
Luminous efficiency (lm/W)	81
Beam angle (°)	-
Color Temperature (K)	3000
CRI	≥80
Installation	Inground
Dimension (mm)	115 x 140
Housing	Diecast aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Clear tempered glass
Reflector	Aluminium
Optic	-
IP rating	67
Finish Color	-
Electrical Data	DC 24V
Control	-
Certification	-




Drawing

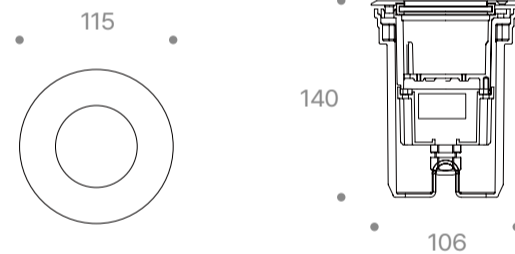

Accessory



Honeycomb Grille



Strip Glass

Photometric Data

Condition	7.5W . 3000K . 610lm
-----------	----------------------

