

Kailux

Last Update : 2023 . 08

Code


E0605-18C30B000 / E0605-18C30D000

Technical data




LED Source	COB
Luminous Flux (lm)	1725(3000K)
Power (W)	18
Luminous efficiency (lm/W)	95
Beam angle (°)	30, 50
Color Temperature (K)	3000
CRI	≥80
Installation	Floor, Wall
Dimension (mm)	161 x 180 x 203
Housing	Diecast aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Clear tempered glass
Reflector	Aluminium
Optic	-
IP rating	65
Finish Color	Dark gray powdercoat finish
Electrical Data	AC 220~240V, 50~60Hz or DC 24V
Control	-
Certification	-

Drawing

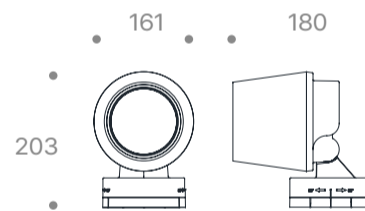

Photometric Data

Condition	18W . 3000K . 1725lm
-----------	----------------------

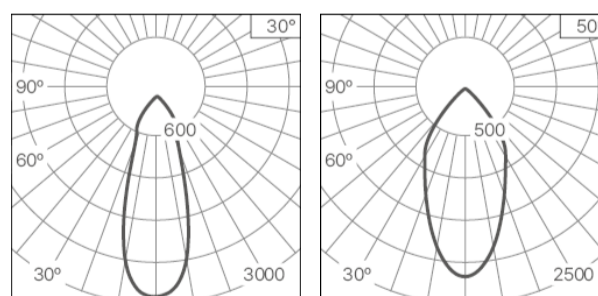

Kailux

Last Update : 2023 . 08

Code


E0605-25C30B000 / E0605-25C30D000

Technical data



LED Source	COB
Luminous Flux (lm)	1912(3000K)
Power (W)	25
Luminous efficiency (lm/W)	76
Beam angle (°)	30, 50
Color Temperature (K)	3000
CRI	≥80
Installation	Floor, Wall
Dimension (mm)	161 x 180 x 203
Housing	Diecast aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Clear tempered glass
Reflector	Aluminium
Optic	-
IP rating	65
Finish Color	Dark gray powdercoat finish
Electrical Data	AC 220~240V, 50~60Hz or DC 24V
Control	-
Certification	-

Drawing

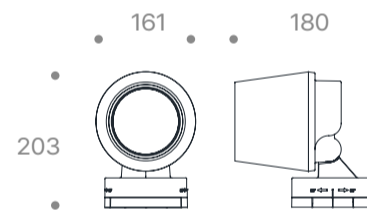

Photometric Data

Condition	25W . 3000K . 1910lm
-----------	----------------------

