

Code


E1120-48S30Z100 / E1120-48SRZ100 / E1120-48SWZ100
 E1120-24S30Z050 / E1120-24SRZ050 / E1120-24SWZ050

Technical data



LED Source	SMD
Luminous Flux (lm)	4613 / 4391 / 2806 / 2245 (3000K)
Power (W)	60 / 48 / 30 / 24
Luminous efficiency (lm/W)	76
Beam angle (°)	15, 30, 45, 15 x 45, 10 x 60
Color Temperature (K)	3000, 4000, 5700, RGB, RGBW
CRI	≥80
Installation	Floor, Wall, Ceiling
Dimension (mm)	43 x 101 x 1000 / 500
Housing	Diecast & Extruded aluminium body, Stainless steel screws, Silicone seal gaskets
Diffuser	Clear tempered glass
Reflector	-
Optic	PMMA
IP rating	65
Finish Color	Dark gray powdercoat finish
Electrical Data	DC 24V
Control	ON / OFF or DMX
Certification	-

Drawing

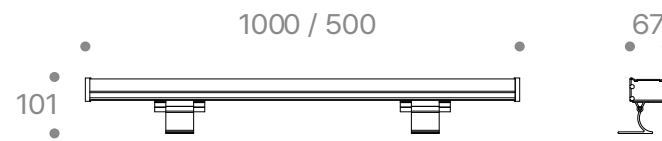

Photometric Data

Condition	60W . 3000K . 4613lm
-----------	----------------------

